


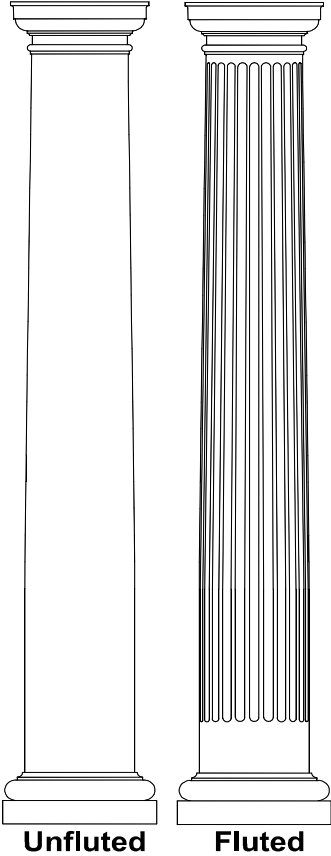


Poly-Classic Round Tapered Column Specification Tables

Poly-Classic column shafts are architecturally detailed and molded from fiberglass reinforced polymer. Caps and bases are manufactured from low maintenance materials: FRP, fiberglass, polyurethane, polystyrene, etc. CAD prints are available singly in PDF (email), DXF or DWG (email), FAX, or on drafting vellum (24" x 36") upon request. Split columns and split/reassembled columns are NOT load bearing. Split plans and reassembly instructions are on page 19. Columns must be painted. Please see installation instructions on page 16-19. Hardware kits for column installation and reassembly of split columns are on page 6. See page 10 for fluting specifications.



Nominal Shaft Diameter†	Optional Attic Base						
	Plinth		Round				
	A	B	C	D	E	F	B-F
8"	10 7/8	1 7/8	1 1/8	7/8	3/4	1/2	5 1/8
10"	13 1/2	2 3/8	1 1/4	1 1/8	7/8	5/8	6 1/4
12"	16 1/8	2 3/4	1 1/2	1 3/8	1	5/8	7 1/4
14"	18 1/2	3 5/16	1 3/4	1 21/32	1 1/4	11/16	8 21/32



Round Tapered Shaft				Tuscan Base					Shaft Profile		Tuscan Cap			
Outside Diameter*		Inside Diameter**		Plinth		Torus		Total	Astragal		Echinus	Abacus		Total
Bottom	Top	Bottom	Top	A	B	C	D	B-D	E	F	G	H	I	J
6"	4 3/4	4 3/4	3 3/4	7 31/32	1 1/2	1 1/4	15/32	3 7/32	1/2	31/32	31/32	1 1/16	7 1/2	2 1/32
8"	6 1/2	6 3/4	5 1/2	10 7/8	1 7/8	1 3/4	5/8	4 1/4	1/2	1 3/4	1 5/16	1 3/8	9 7/8	2 11/16
10"	8 1/2	8 3/8	7 3/4	13 1/2	2 3/8	2 1/8	3/4	5 1/4	3/4	1 5/8	1 13/16	1 3/4	12 5/32	3 9/16
12"	10	10 3/4	9 1/4	16 1/4	2 3/4	2 3/8	7/8	6	3/4	1 3/32	1 29/32	2	14 5/8	3 29/32
14"	12	11 1/2	10 1/2	18 19/32	3 11/32	2 31/32	1	7 5/16	1	2 9/32	2 15/32	2 5/16	13 32/32	4 25/32
16"	13 1/2	13 1/2	12	21 5/16	3 27/32	3 11/32	1 1/8	8 5/16	1	2 1/4	2 23/32	2 23/32	19 3/32	5 7/16
18"	15	15	12 3/4	24 1/32	4 7/32	3 31/32	1 3/8	9 9/16	1	2 1/4	2 31/32	2 31/32	21 5/16	5 15/16
20"	17	18	14 7/8	27	4 3/4	4 1/16	1 3/4	10 9/16	1 5/16	2 3/4	3 1/8	3 7/16	24 1/4	6 9/16
24"	20	22	18	32 1/2	5 3/4	5 1/4	2 1/4	13 1/4	1 5/8	4 3/4	3 3/16	4 1/8	28 3/4	7 5/16

* Actual outside diameters are approximately 5/16" to 1/2" less than shown.

** Actual inside diameters may vary by 3/8"