

Poly-Classic Craftsman Series Tapered Columns Specification Tables

Product Information:



Limited Lifetime Warranty (Warranty coverage requires adherence to Turncraft's installation and painting instructions, and is limited to materials only.)

Fluted and Raised Panel shafts are designed to allow field trimming up to 6" (trim from bottom only)

Columns must be trimmed to 1/4" shorter than the required opening to allow for product expansion. (The cap moulding will cover the 1/4" space.) Specifications shown are subject to change without notice.

Columns are NOT load bearing.

Non-Tapered shafts are 1/2" shorter than nominal. The cap can be raised to the overhead beam/soffit to cover any gaps.

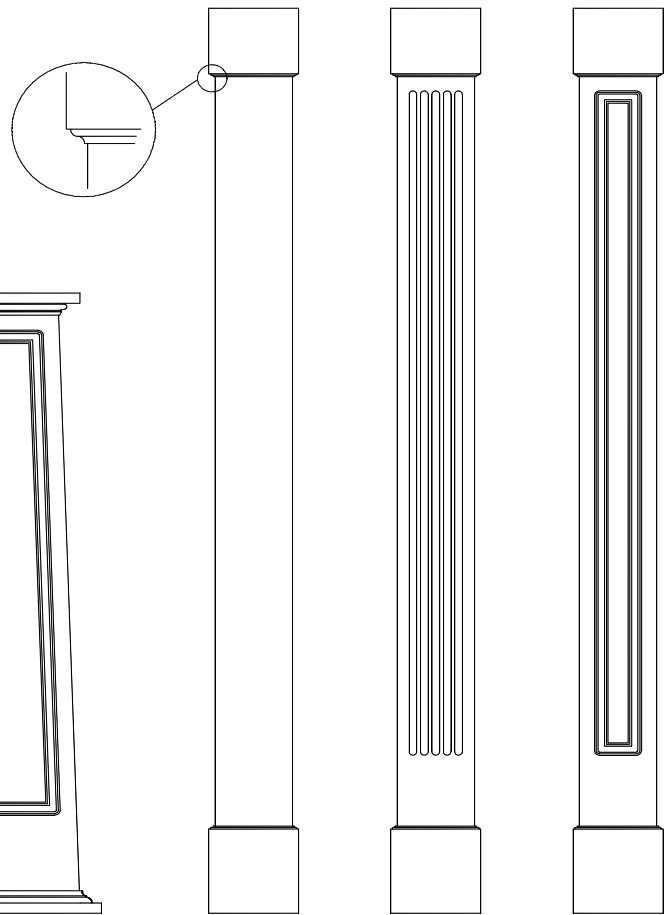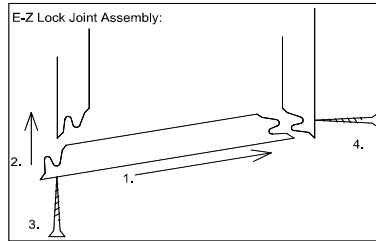

TAPERED COLUMNS:

| Column Nominal Bottom Width | Column NET Bottom Width* | Column Nominal Top Width | Column NET Top Width | Base Plinth Width | Base Plinth Height | Base Moulding Height | Base Inside Opening | Cap Abacus Width | Cap Abacus Height | Cap Moulding Height | Cap Inside Opening |
|-----------------------------|--------------------------|--------------------------|----------------------|-------------------|--------------------|----------------------|---------------------|------------------|-------------------|---------------------|--------------------|
| 12 | 11 5/8 | 8 | 7 5/8 | 15 5/8 | 1 | 1 1/4 | 7 5/8 | 11 5/8 | 1 | 1 1/8 | 3 5/8 |
| 16 | 15 5/8 | 12 | 11 5/8 | 19 5/8 | 1 | 1 1/4 | 11 5/8 | 15 5/8 | 1 | 1 1/8 | 7 5/8 |
| 20 | 19 5/8 | 14 | 13 5/8 | 23 5/8 | 1 | 1 1/4 | 13 5/8 | 17 5/8 | 1 | 1 1/8 | 9 5/8 |
| 24 | 23 5/8 | 16 | 15 5/8 | 27 5/8 | 1 | 1 1/4 | 15 5/8 | 19 5/8 | 1 | 1 1/8 | 11 5/8 |

* before trimming

NON-TAPERED COLUMNS:

| Column Nominal Width | Column NET Width | Inside Diameter | Base Height | Cap Height | Cap and Base Width | Number of Flutes | Flute Width (approx.) | Side of Shaft Before Flute | Recess Width on Raised Panels* | Side & Top of Shaft Before Recess* |
|----------------------|------------------|-----------------|-------------|------------|--------------------|------------------|-----------------------|----------------------------|--------------------------------|------------------------------------|
| 6 | 5.625 | 4.375 | 9.25 | 7.25 | 6.875 | 5 | 1/2 | 1 1/16 | 1 1/4 | 1 1/2 |
| 8 | 7.625 | 6.375 | 9.25 | 7.25 | 8.875 | 5 | 3/4 | 1 3/16 | 1 1/4 | 1 1/2 |
| 10 | 9.625 | 8.375 | 9.25 | 7.25 | 10.875 | 5 | 1 | 1 5/16 | 1 1/4 | 1 1/2 |
| 12 | 11.625 | 10.375 | 9.25 | 7.25 | 12.875 | 5 | 1 1/4 | 1 3/16 | 1 1/4 | 1 1/2 |

* also applies to TAPERED raised panel columns